



## WTD95

HEMYÜZ KAPI SİSTEMİ  
FLAT DOOR SYSTEM



İÇE AÇILIR CAMLI KAPI  
INWARD OPENING WITH GLAZING  
DIŞA AÇILIR CAMLI KAPI  
OUTWARD OPENING WITH GLAZING



İÇE AÇILIR PANEL KAPI  
INWARD OPENING WITH PANEL DOOR  
DIŞA AÇILIR PANEL KAPI  
OUTWARD OPENING WITH PANEL DOOR

KASA GENİŞLİĞİ : 95 mm

Frame Width

KANAT DERİNLİĞİ : 95 mm

Sash Depth

SİSTEM ET KALINLIĞI : 2 mm



System Wall Thickness

ISI BARIYERİ : 39 mm

Insulation Barrier

CAM KALINLIĞI : 38 - 64 mm

Glass Thickness

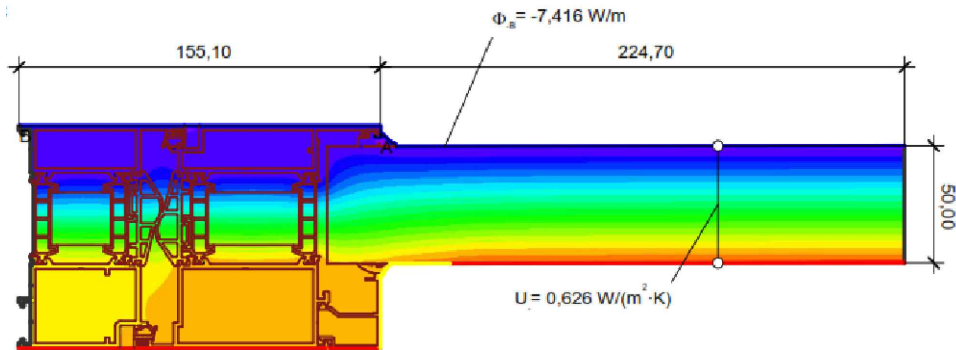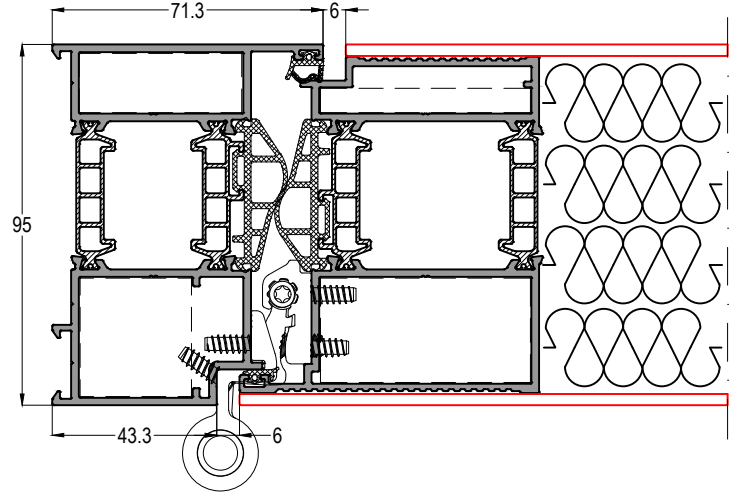

$$U_{TAB} = \frac{\frac{\Phi}{\Delta T} - U_p \cdot b_p}{b_i} = \frac{\frac{7,416}{20,000} - 0,626 \cdot 0,225}{0,155} = 1,48 \text{ W/(m}^2 \cdot \text{K)}$$